


Фрагмент фасада 9
Facade fragment 9

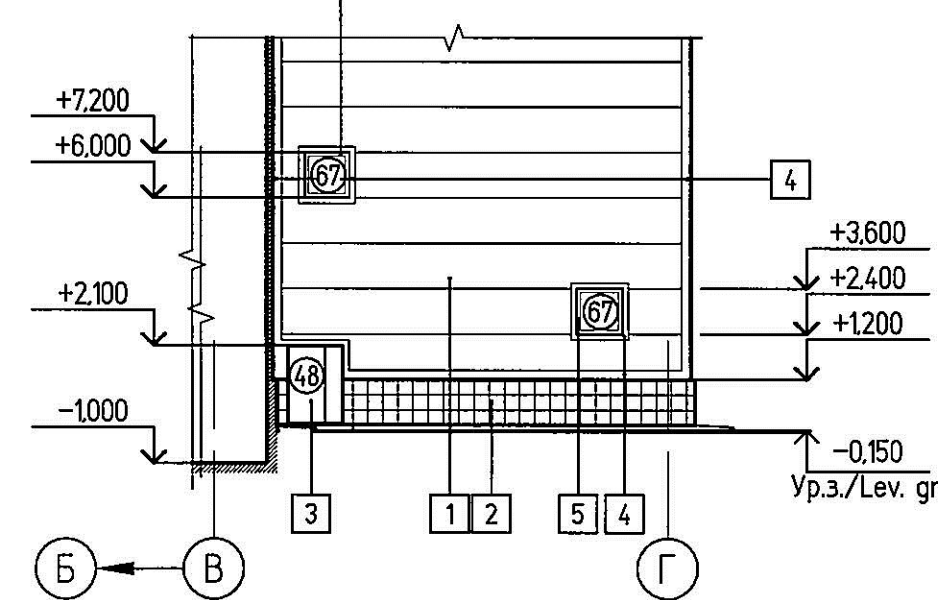

framed structure and fastening; cover strips; drip strips; sealant; section of openings framing and perimeter of walls with factory finishing etc.

4 Consumption of materials as per works indicated in Items 1, 3, 11 shall be considered in manufacturing documentation.

5 Specification of filling openings' elements on external walls are given on sheet BG3-OUEC-###-AR-01-01-003.

6 On the building facade the width of visible part metal framing comes to:

- walls (wall angles, joining to socle, rampart) – 250 mm.
- openings (gates, windows, doors, stained glass) – 850 mm.

The overall width and consumption of metal framing shall be considered in manufacturing documentation.

7 Carry out metal stairs, platforms and entrance canopies as per BG3-OUEC-###-CM drawings.

8 The ventilated facade of socle part to be accomplished by the Manufacturer, as analogue it is occupied a suspended ventilated facade system Thermomaks-V-10.

9 Perform jointing around masonry by packing rubber spacer.

10 Legends to be seen on sheet 110 of the given packaged set of drawings

11 In place where assembly 3 is marked – jointing internal wall of blocks 190 mm thick to sandwich type panels, you are requested to install grid support posts of external walls. See drawings BG3-OUEC-###-AR-01-02-004; 005; 006; 007; 008; 009 for referencing of posts.

12 All openings in walls to be framed along perimeter from inside ≥ 20 .

13 Openings for louvers to be framed from inside ≥ 120 .

1 The a.m. louvers are intended for evacuation of gases produced by coal dust explosion and
2 limitation of atmospheric precipitation. Protection louvers are designed, manufactured and installed
3 by factory-manufacturer, when developing connections. In accordance with the
4 factory-manufacturer documentation, louvers with all their components are complete supplied.

5 Galzing of specified outdoor stained-glass windows shall be easy detachable

6 The wall sandwich type panels should be supplied in a packaged set, including: elements of

Формат А2х3